

Menzi Muck **M525x**

Menzi Muck **M535x**

Menzi Muck **M545x**

M5 X



**menzi
muck**

Menzi Muck, the technologic leader. Details that make us number one.

Menzi Boom

Patented, tried and tested as well as unrivalled boom with a maximum lifting force of 9500 kg/ 20'950 lbs and unique kinematics. Boom cylinder positioned horizontally in the centre section. Rules out collisions at the boom cylinder.

Wide-angle kinematics with power booster

Menzi power booster provides maximum output over the entire working range.

Swivelling with large slewing ring

Maximum swivelling force across the entire engine speed range featuring maintenance-free slewing motor.

Chassis

Innovative, patented chassis concept with ideal kinematics while maintaining ideal power ratios. P-Vation for horizontal and vertical parallel adjustment of the wheels. Vx-Drive for infinitely variable Power drive up to 15 km/h / 9,3 mph with maximum torque across the entire adjustment range.

Secure hose system

Hydraulic hoses are protected at the chassis and installed at the boom within the operator's field of vision.

Up to 800 mm wide tyres available

For special applications and situations.

Mountain stabilizers (optional)

Installed at the rear and/or front to guarantee safe working conditions in extreme terrain.

SWISSPOWER 



Deutz diesel engine

Powerful, efficient and reliable 4-cylinder diesel engine complying with EU emission standards Stage V (optional, Tier IIIA). Deutz system: selective, catalytic reduction in combination with active diesel particulate filter. Environmental protection while maintaining the output!

APM - up to 30% fuel savings

The APM controller (Anticipating Power Management) guarantees fast and harmonious interplay between engine and hydraulics.

Powerline

Separate pump to boost attachments' efficiency. Individual pressure and flow adaptations for a large number of tools.

- + Panorama cockpit**
Maximum, all-round vision and optimised ergonomics for fatigue-free working.
- + Tool management**
Definition of comprehensive parameters on the display for up to 15 attachments.
- + Personalised working environment**
Intuitive navigation and individually adjustable parameters for safe and efficient operation.
- + Steel structure**
Minimized forces on the steel construction by a optimized pivot placement. Largely dimensioned bearings and solid material thicknesses increase safety levels in the most challenging applications.
- + Hydraulic cable winch**
Interface for installation of the cable winch with an optimum cable guide. At front and rear mountable.

Panorama cockpit

Unobstructed view of the entire working environment and chassis for safety and full control in any situation. Low-vibration, noise-insulated cab for a perfect feeling of space and relaxed work.

Comfort

Ergonomic joystick with proportional rollers, hand rest, adjustable armrests and foot pedals, air-suspension comfort operator's seat, powerful heating with 7 individual nozzles, air conditioning, DAB+ radio and many more features for maximum comfort.

Dashboard with LCD

Clearly arranged dials with integrated colour display. Separate display and tumbler switch with LED lighting.

Safety

ROPS as per DIN ISO 3471 and FOPS as per DIN ISO 3449, four-point seat belt, reversing camera, LED headlights, different protective grid variants and many more features for maximum safety.

Remote machine monitoring

Comprehensive service tool to remotely record relevant machine data.




**menzi
muck**

M5

X

**The panorama cockpit.
Focusing on the operator.**





P-VATION by Menzi Muck x-Generation. Revolutionary, symmetric stabilisation.

Outstanding kinematics

Replacement of the tried-and-tested P-Matic system by the completely new, automatic P-Vation support development at the front and rear. Sophisticated arrangement of pivot points on the chassis for horizontal and vertical parallel adjustment of all wheels. Maximum adjustment range and steering angle to boost safety and application options.

Unrivalled, incredible fording depth

Maximum ground clearance guarantees a fording depth of 2200 mm/ 86,6 inch for municipal use and deployments in water.

Unmatched gradients

P-Vation support for gradients other machines can't handle. Unparalleled proximity to slopes and maximum width adjustment of the wheels of over 6000mm/ 236,2 inch for genuine stability. Working on slopes (moving across the slope) on even steeper dams and embankments possible.

Smooth running and simplified steering

- + Linear travel sensors in the cylinder
- + Angle sensors
- + Automatic direction sensors
- + Central wheel bearing suspension

Perfected mountain stabilizers

For working in very steep terrain, installation of solid mountain stabilizers at the front and rear possible. Ideal design guarantees perfect anchor point to the slope angle.

Chain mode

Collision protection thanks to electrical actuation of forestry and snow chain mode.

Different steering modes

- Front-axle steering
- Rear-axle steering
- 4-wheel steering
- Crab steering



Mountain stabilizers automatically out of operating range



Intelligent arrangement of pivot points



Solid steel design for most challenging deployments



Vx-DRIVE by Menzi Muck. Intelligent drive technology.

Infinitely variable

Infinitely variable power drive up to 15 km/h/ 9,3 mph at maximum torque across the entire adjustment range and every driving phase. Synchronous, efficient engine speed and drive pump actuation using the driving pedal.

Protects substrate and tyres

Automatic wheel speed adaptation thanks to innovative steering angle measurement to protect the ground. Improved traction through universal steering angle of all 4 wheels to protect the ground while driving.

Manual differential lock for off-road mode

Self-locking differential lock on slippery or soft ground for maximum traction and strong traction.

Tyres up to 800 mm

In special applications and situations, wide tyres up to 800 mm boost safety and application options.



The speciality from the M545x
Work up to 45° fall line or 30° shift line



**Economical solution of
demanding, multifaceted tasks.**



M5



Can't be done, doesn't exist

Whether on steep slopes up to 100%, in water depths up to 2.2m/ 7,25 ft or in deep mud, whether in the mountains or in the forest: the Menzi Muck M5x knows no limits. The flexible undercarriage can be adapted to any terrain. In the construction industry, the application possibilities of the M5x exceed, those of crawler excavators with the same hydraulic power. The M5x is the perfect carrier for various drilling systems. As well other accessories, which need a high oil flow for the municipality or forestry sector can be attached. In the forest, the Menzi Muck is used as a steep-slope harvester in the storm wood, for targeted thinning or clear-cutting.

SWISSPOWER+



M5
X



Technical data, dimensions and values of generation x.

Engine

Deutz 4-cylinder diesel	TCD 4.1 L4
Emission standards	IIIA/ V
Engine capacity	4038 cm3/246 cu in
Output as per ISO 3046	115 kW (156 hp) at 2000 rpm
SCR catalytic converter	with AdBlue supply (Stage V)
Integrated diesel particulate filter	with automatic regeneration (Stage V)

Vx-Drive traction drive

Infinitely adjustable speed max.	to 15 km/h/ 9,3 mph
Separate hydraulic pump	max. 210 l/min., 420 bar 55,5 gal/ 6092 psi
Driving brake	Hydrostatic
Parking brake	Spring loaded accumulator

Weight in kg

M525x excluding tools from	12400 kg/ 27337 lbs
M535x excluding tools from	13000 kg/ 28660 lbs
M545x excluding tools from	13500 kg/ 29762 lbs

Unrivalled forces

Lifting force @ 3.0 m boom length	9500 kg/ 93,20 kN
Lifting force @ 4.5 m boom length	6400 kg/ 62,78 kN
Lifting force @ 6.0 m boom length	4300 kg/ 42,18 kN
Breakaway force	109 kN
Shear force	74 kN
Thrust, telescope	191 kN

Slewing

A radial piston motor with automatic front multi-disc brake acts on the internal gears of the large-scale double-row slewing ring.	
Slewing range	360° endless
Slewing torque	52000 Nm
Slewing speed	Up to 10 rpm
Slewing ring module 10	Ø 1200 mm/ 47,24 inch

Hydraulics

Working hydraulics	Rexroth LUDV load sensing
Pumps	Swash-plate axial piston pumps
Working pump	max. 290 l/min at 320 bar 76,61 gal/4641,2 psi
Fan pump	max. 52 l/min at 200 bar 13,74 gal/2900,8 psi
Additional connections	6

Hydraulic control circuits

Hydraulic auxiliary connections are adjusted using the colour display	
Control circuit 1 on boom: proportional, litres adjustable	Max. 200 l/min 52,33 gal/min
Control circuit 2 on boom: proportional, litres adjustable	Max. 100 l/min 26,42 gal/min
Control circuit 3 on boom (digital, litres adjustable)	Max. 50 l/min 13,21 gal/min
Control circuit 4 on boom (quick changer)	30 - 300 bar 435 - 4351 psi
Powerline (digital, litres and pressure adjustable)	max. 220 l/min, 350 bar 58,12 gal/5076,3 psi
Cable winch connection on chassis (proportional, litres adjustable)	max. 120 l/min 31,7 gal/min
Return line (on boom)	
Leak oil line	

Filling quantities

Fuel tank	180 litres/ 47,55 gal
Spare tank in chassis	240 litres/ 63,4 gal
AdBlue tank	20 litres/ 5,28 gal
Hydraulic oil system capacity	220 litres/ 58,12 gal

Tyres

CH and EU road traffic licence without special permit up to 710 mm tyre width	
Standard	B/Ø in mm
300-15 (M525x)	300/ 820
400/55-17.5 (M535x)	390/ 890
600/50-22.5 (M545x)	600/ 1170
Option	
600/55-23.0	570/ 1370
600/55-26.5	600/ 1340
710/45-26.5	710/ 1340
800/40-26.5	800/ 1340

Innovative standard equipment and useful options.

serial + optional o

Upper carriage

Diesel input pump including limit stop	+
Gas shock supports opening the side and rear panels	+
Integrated tool compartment	+
Additional tool crate	o
Steel parts on upper structure as ram protection	+
Identifies direction of travel and automatically switches over	+

Cab

“Roll-Over-Protection-System” – ROPS as per DIN ISO 3471	+
FOPS protective grid roof as per DIN ISO 3449	o
Demountable windshield OPS-proofed DIN ISO 8084	o
Safety front windshield for forest according to ISO 21876	o
Low levels of vibrations and noise in cab	+
Grammer comfort operator’s seat	+
Grammer Evolution comfort operator’s seat with seat ventilation	o
Ergonomic joystick	+
Cab tilts with hydraulic hand pump	+
Headlight crown on the roof with up to 8 LED headlights	o
5 LED headlights	+
One or two LED additional headlights on boom	o
LED Turning light	o
Protective grid (different variants)	o
Safety glass panels (different variants)	o
Door with sliding window	o
Spacious, ergonomic cockpit	+
Rear-view camera	+
Powerful heating with 7 adjustable air nozzles	+
Air-conditioning unit	o
Auxiliary heating	o
Pollen filter	+
DAB+ radio with CD/USB/MP3 player	+
Four-point seat belt	o
Windscreen washer and wiper system	+
Immobilizer	o
Trackunit remote diagnostics	+
LCD Display	+
USB charger station	o
Depth temperature package	o

Chassis Generation x


Ideally protected components	+
Mountain stabilizers at the front	o
Mountain stabilizers at the rear (M545x)	o
Hydraulic wheel height adjustment (M535x)	+
Cable winch can be installed at the front or rear	+
Vx-Drive	+
Swing axle (M545x)	o
Automatic parking brake	+
Max. engine speed restriction/resolution, driving pedal	+
Substrate protector	+
Differential lock	+
Linear travel sensors in the steering cylinder	+
Active angle sensors	+
Electric chain collision protection	+
Hydraulic free wheels	o


Other specialties

Cylinders on chassis with check valves	+
Cylinders on boom with end position damping	+
Leak oil line	o
Reversible fan	o
Cable winch connection	o
1st + 2nd control circuit	+
3rd + 4th control circuit	o
Powerline	o
Automatic idling	o
Equipment for lifting gear (CH and EU)	o
Electric height limiter	o
Stroke and swivel limiter	o
Road traffic licence (CH and DE)	o
Automatic central lubrication (entire machine or upper structure only)	o
Biodegradable hydraulic oil	o
Hydraulic bypass filter	o
Forestry version	o
Remote control for forestry cable winch	o
Drilling equipment	o
Track equipment	o
Paint finish to specification	o
Vacuum pump	o

The Menzi Muck M525x.


Dimensions.

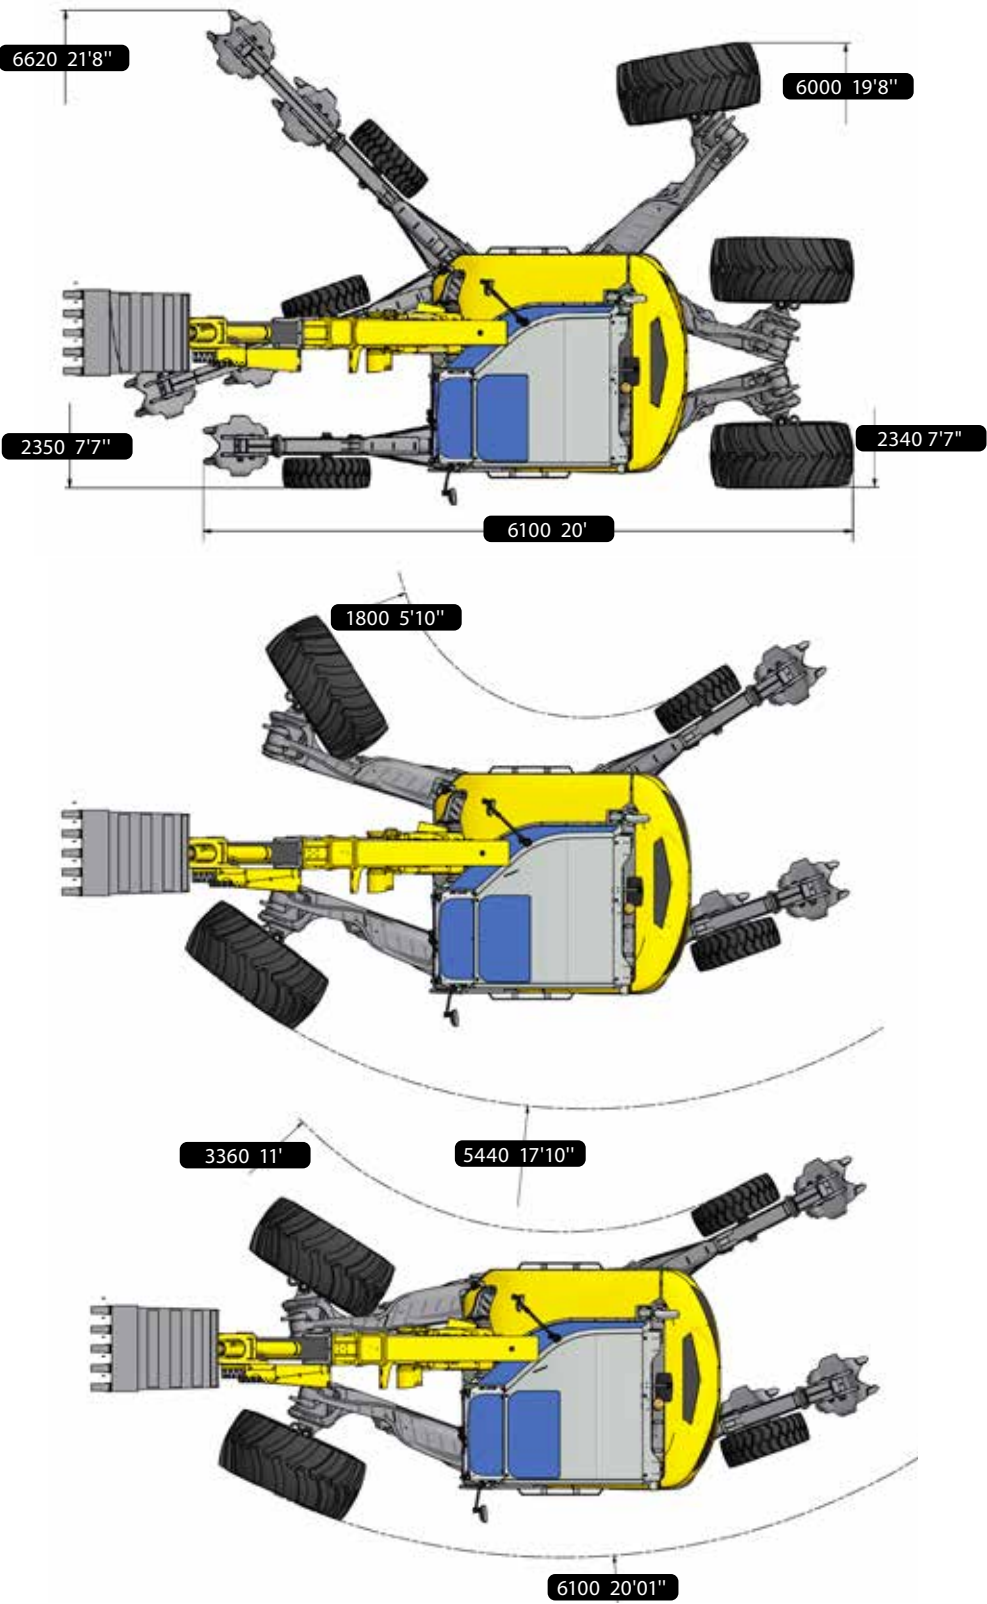


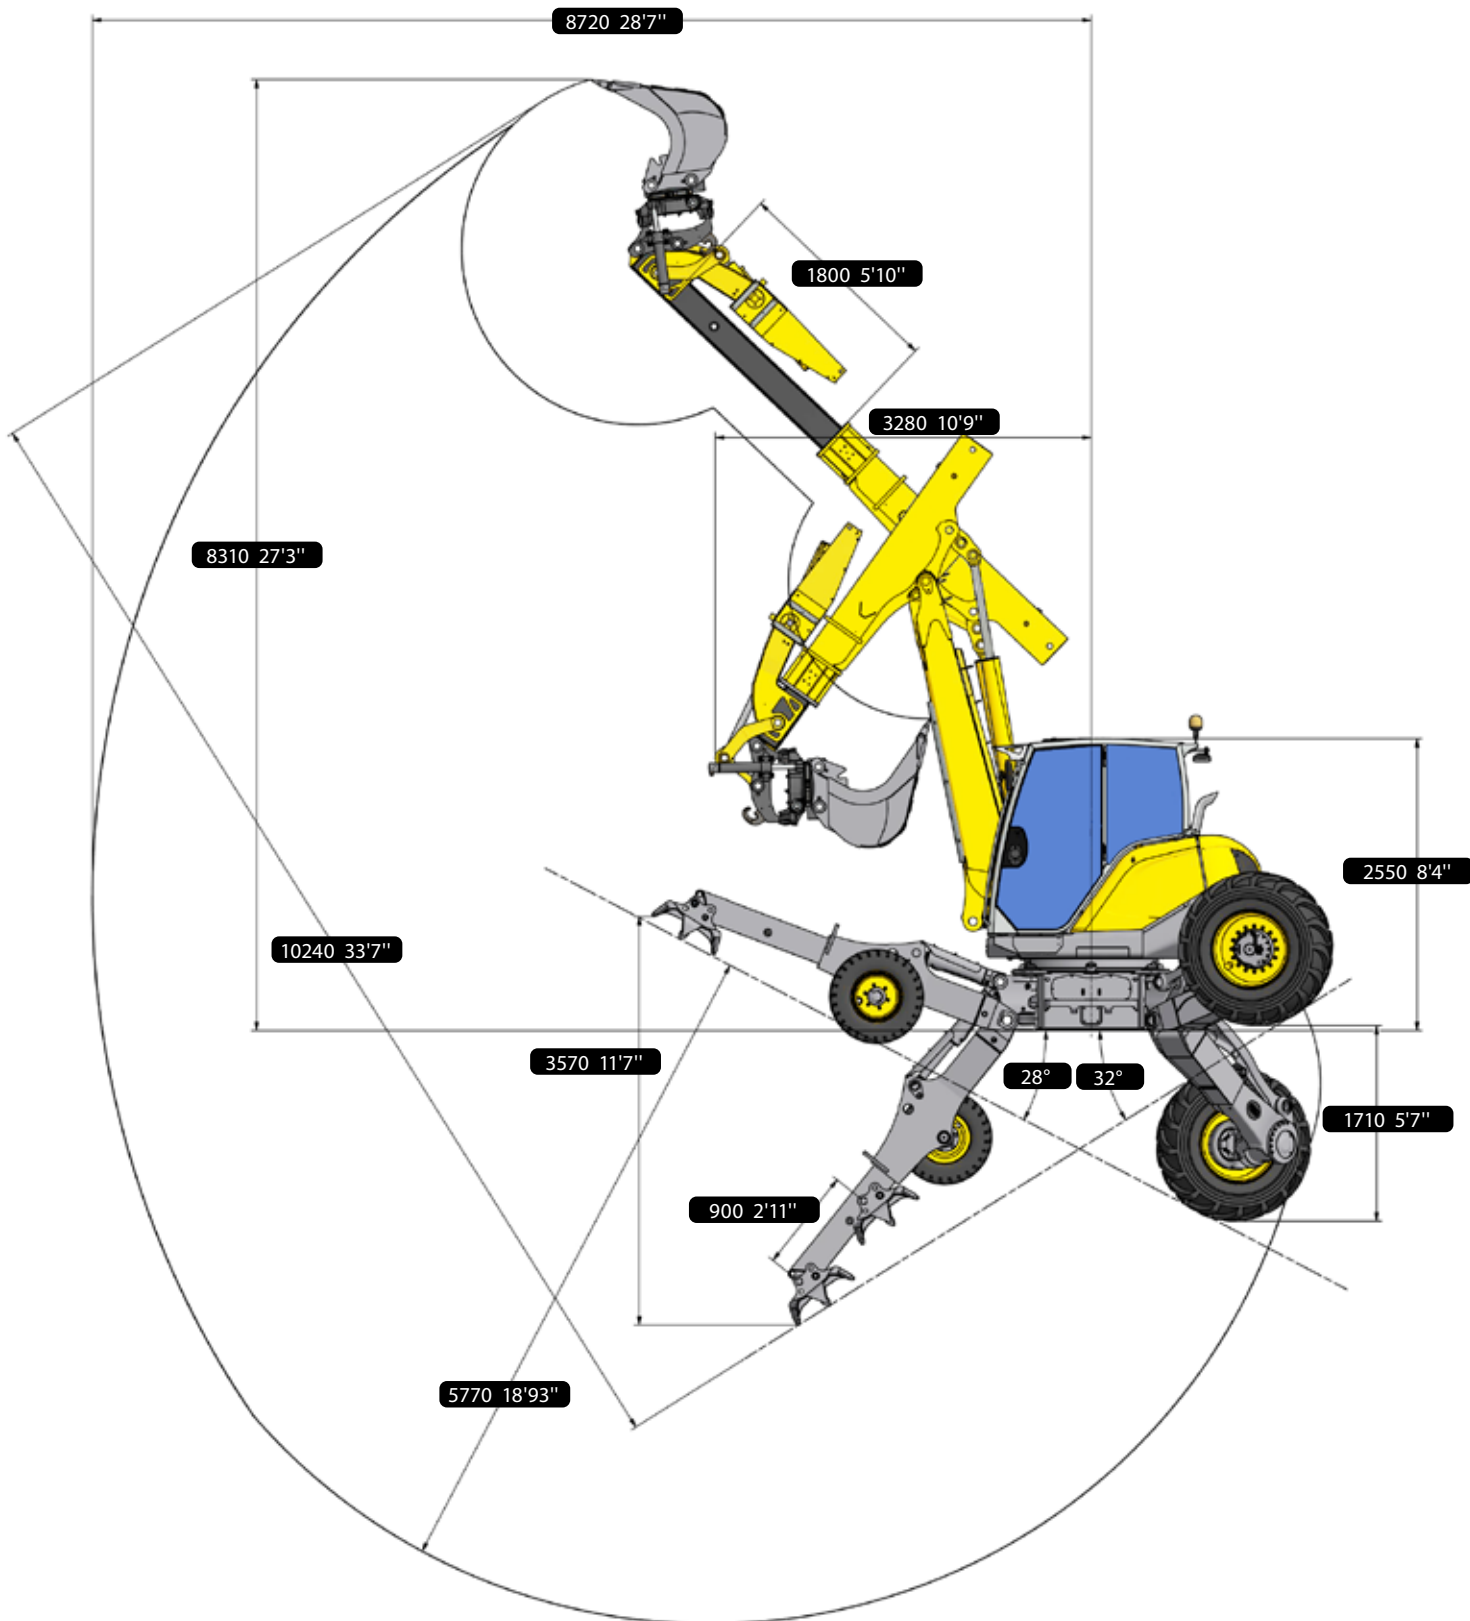

The Menzi Muck M535x.


Dimensions.

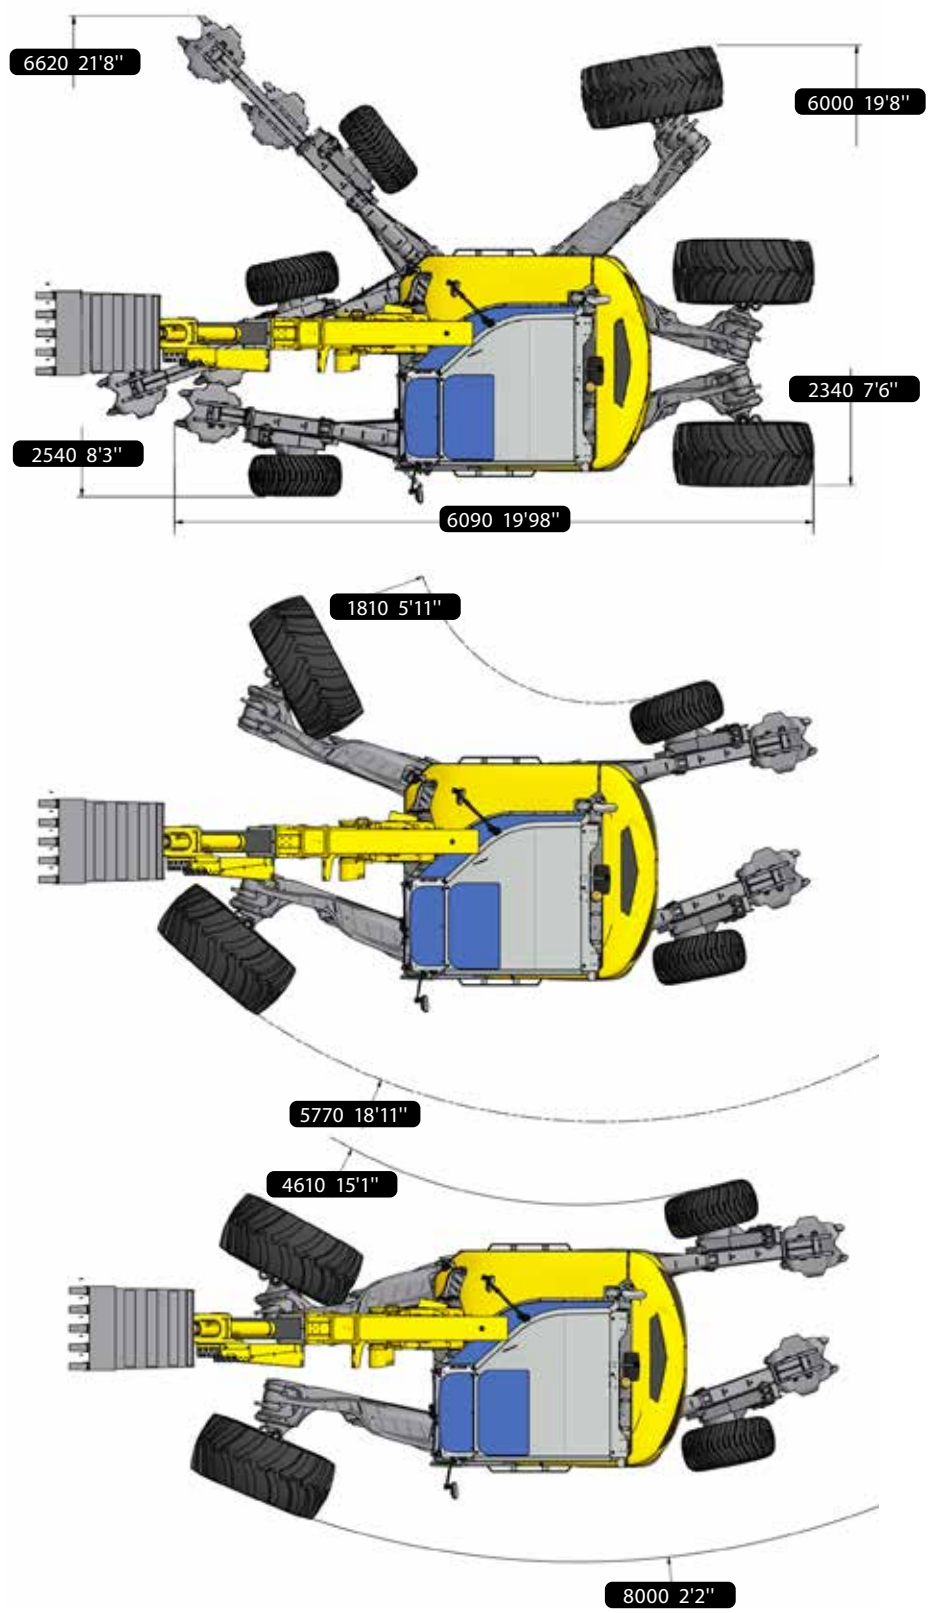


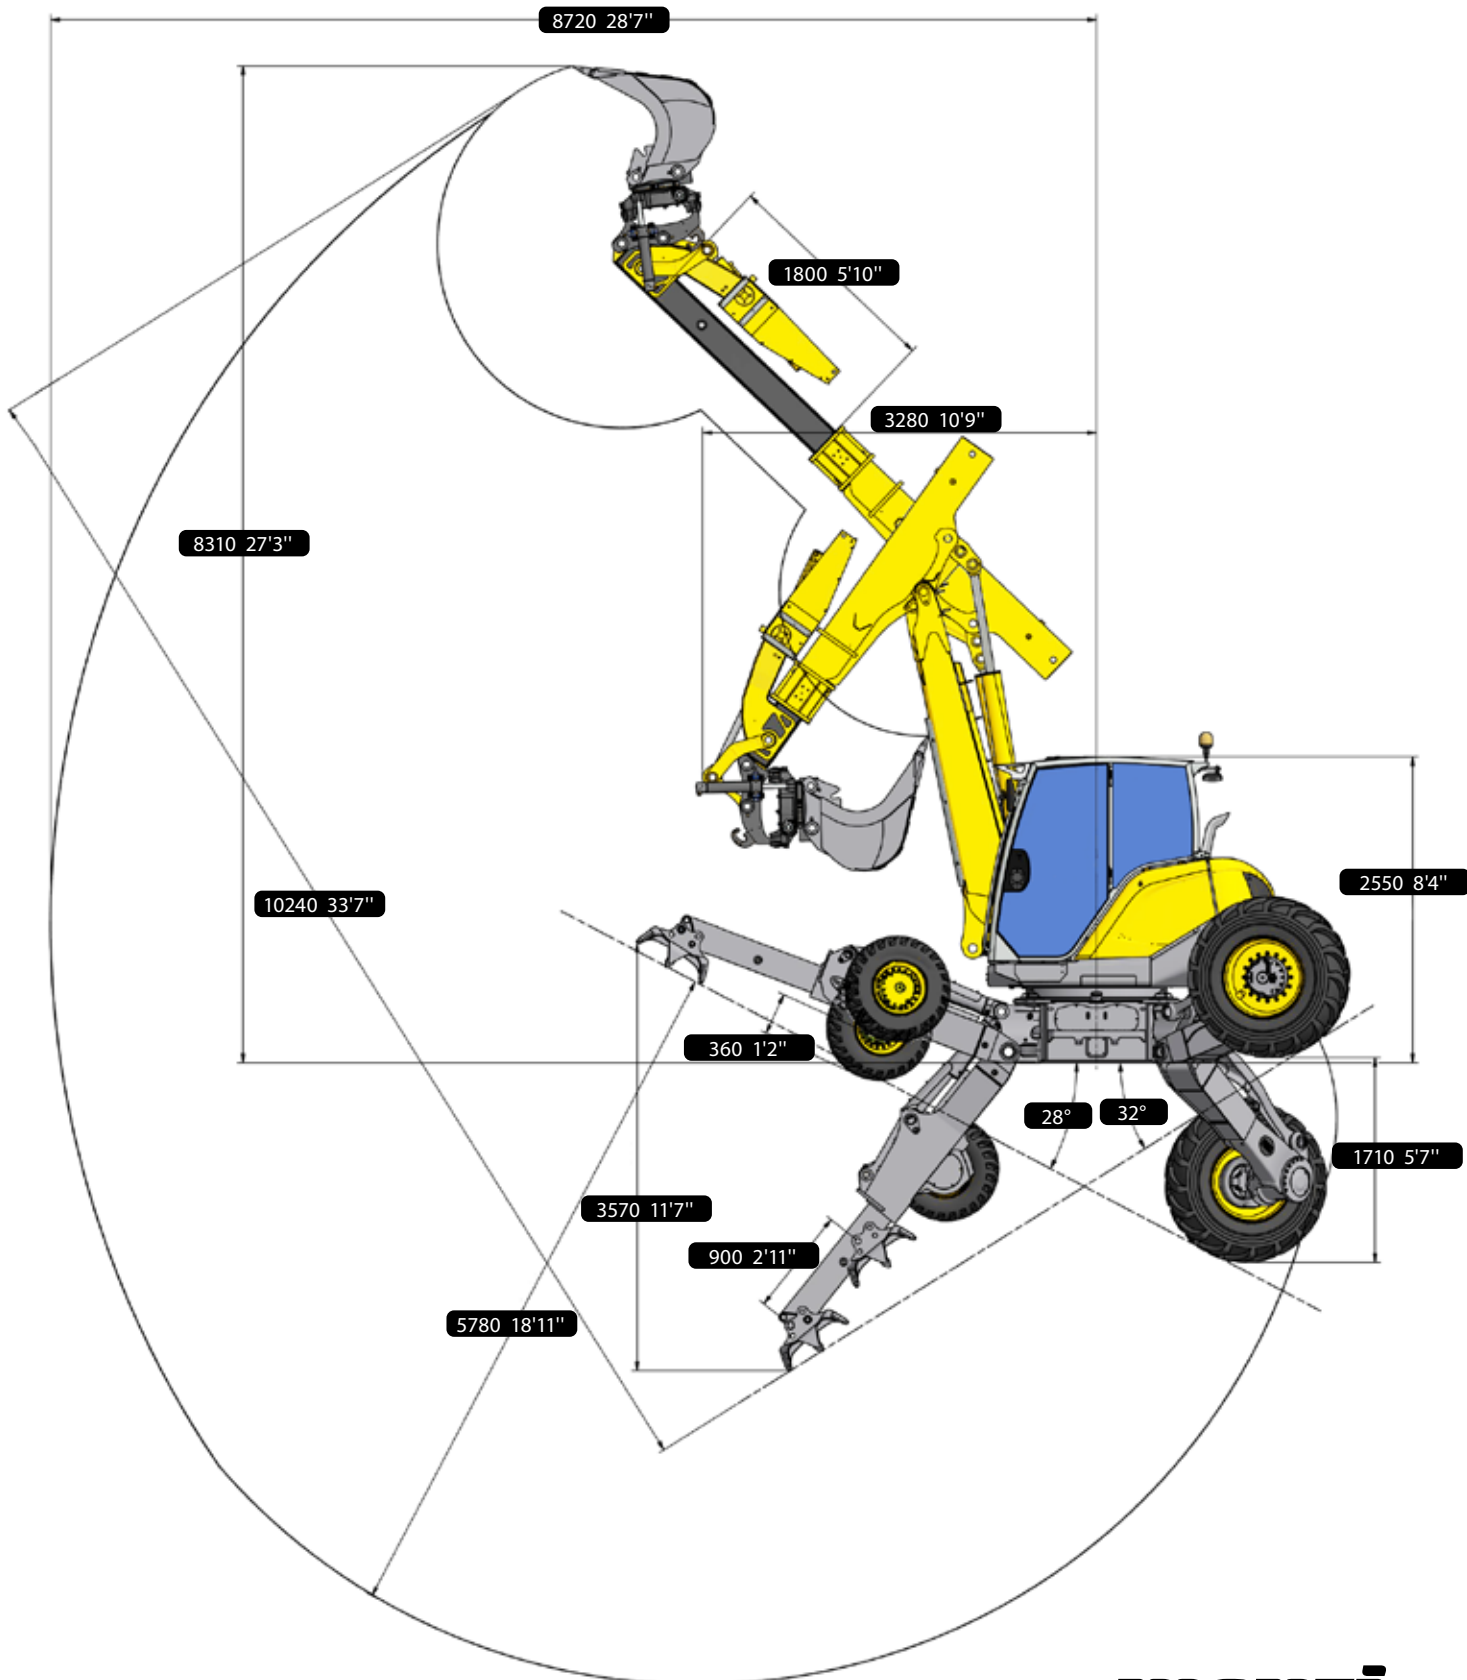

The Menzi Muck M545x.

Dimensions.

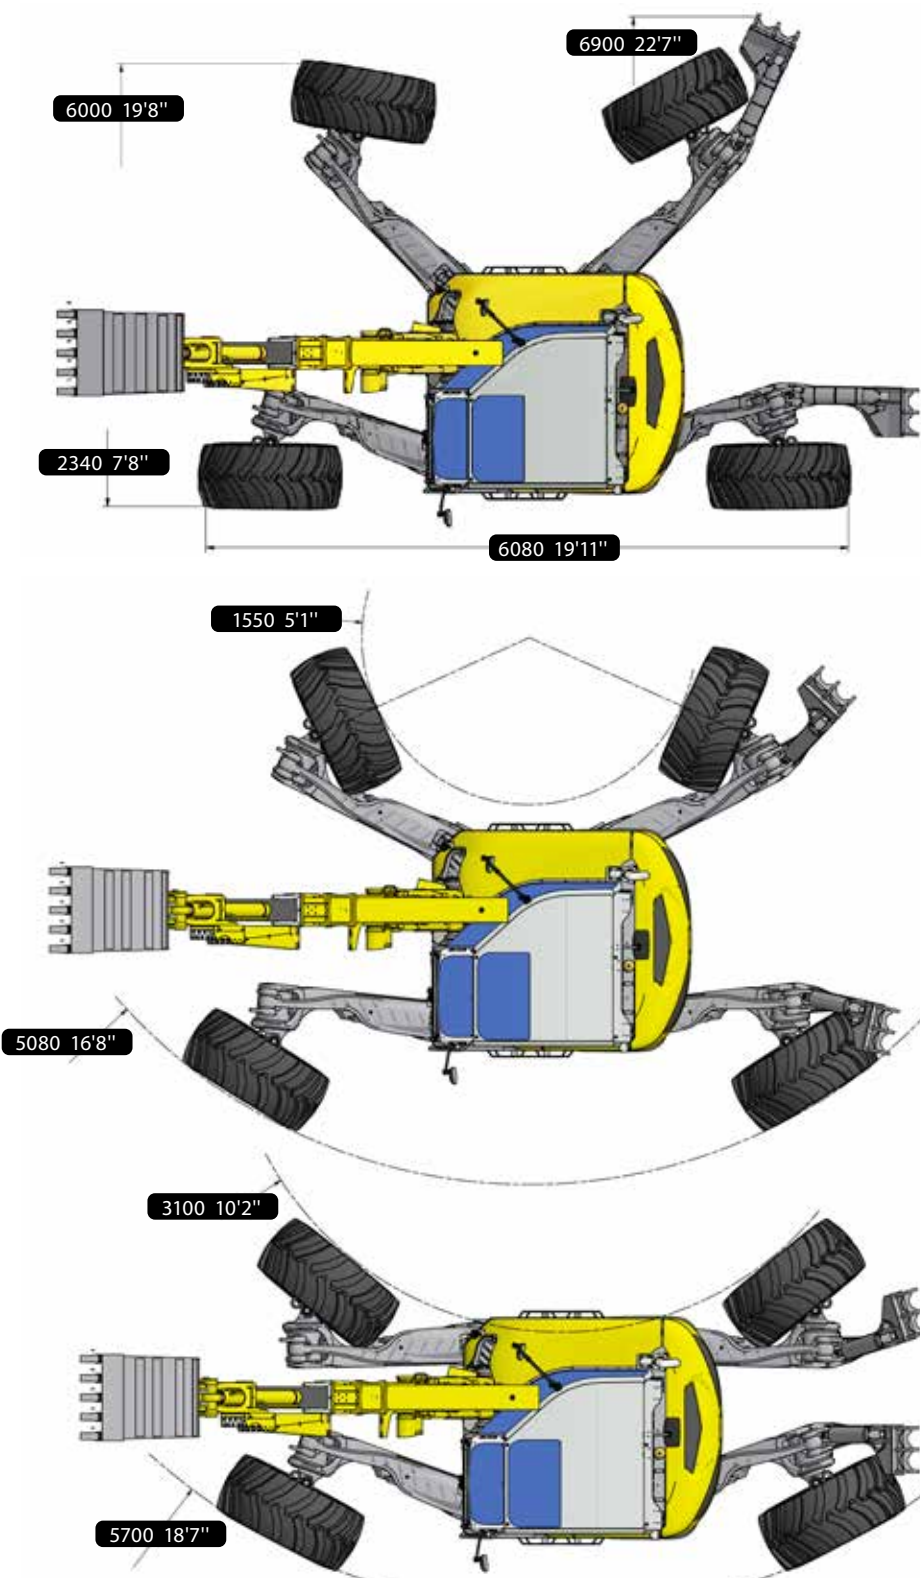

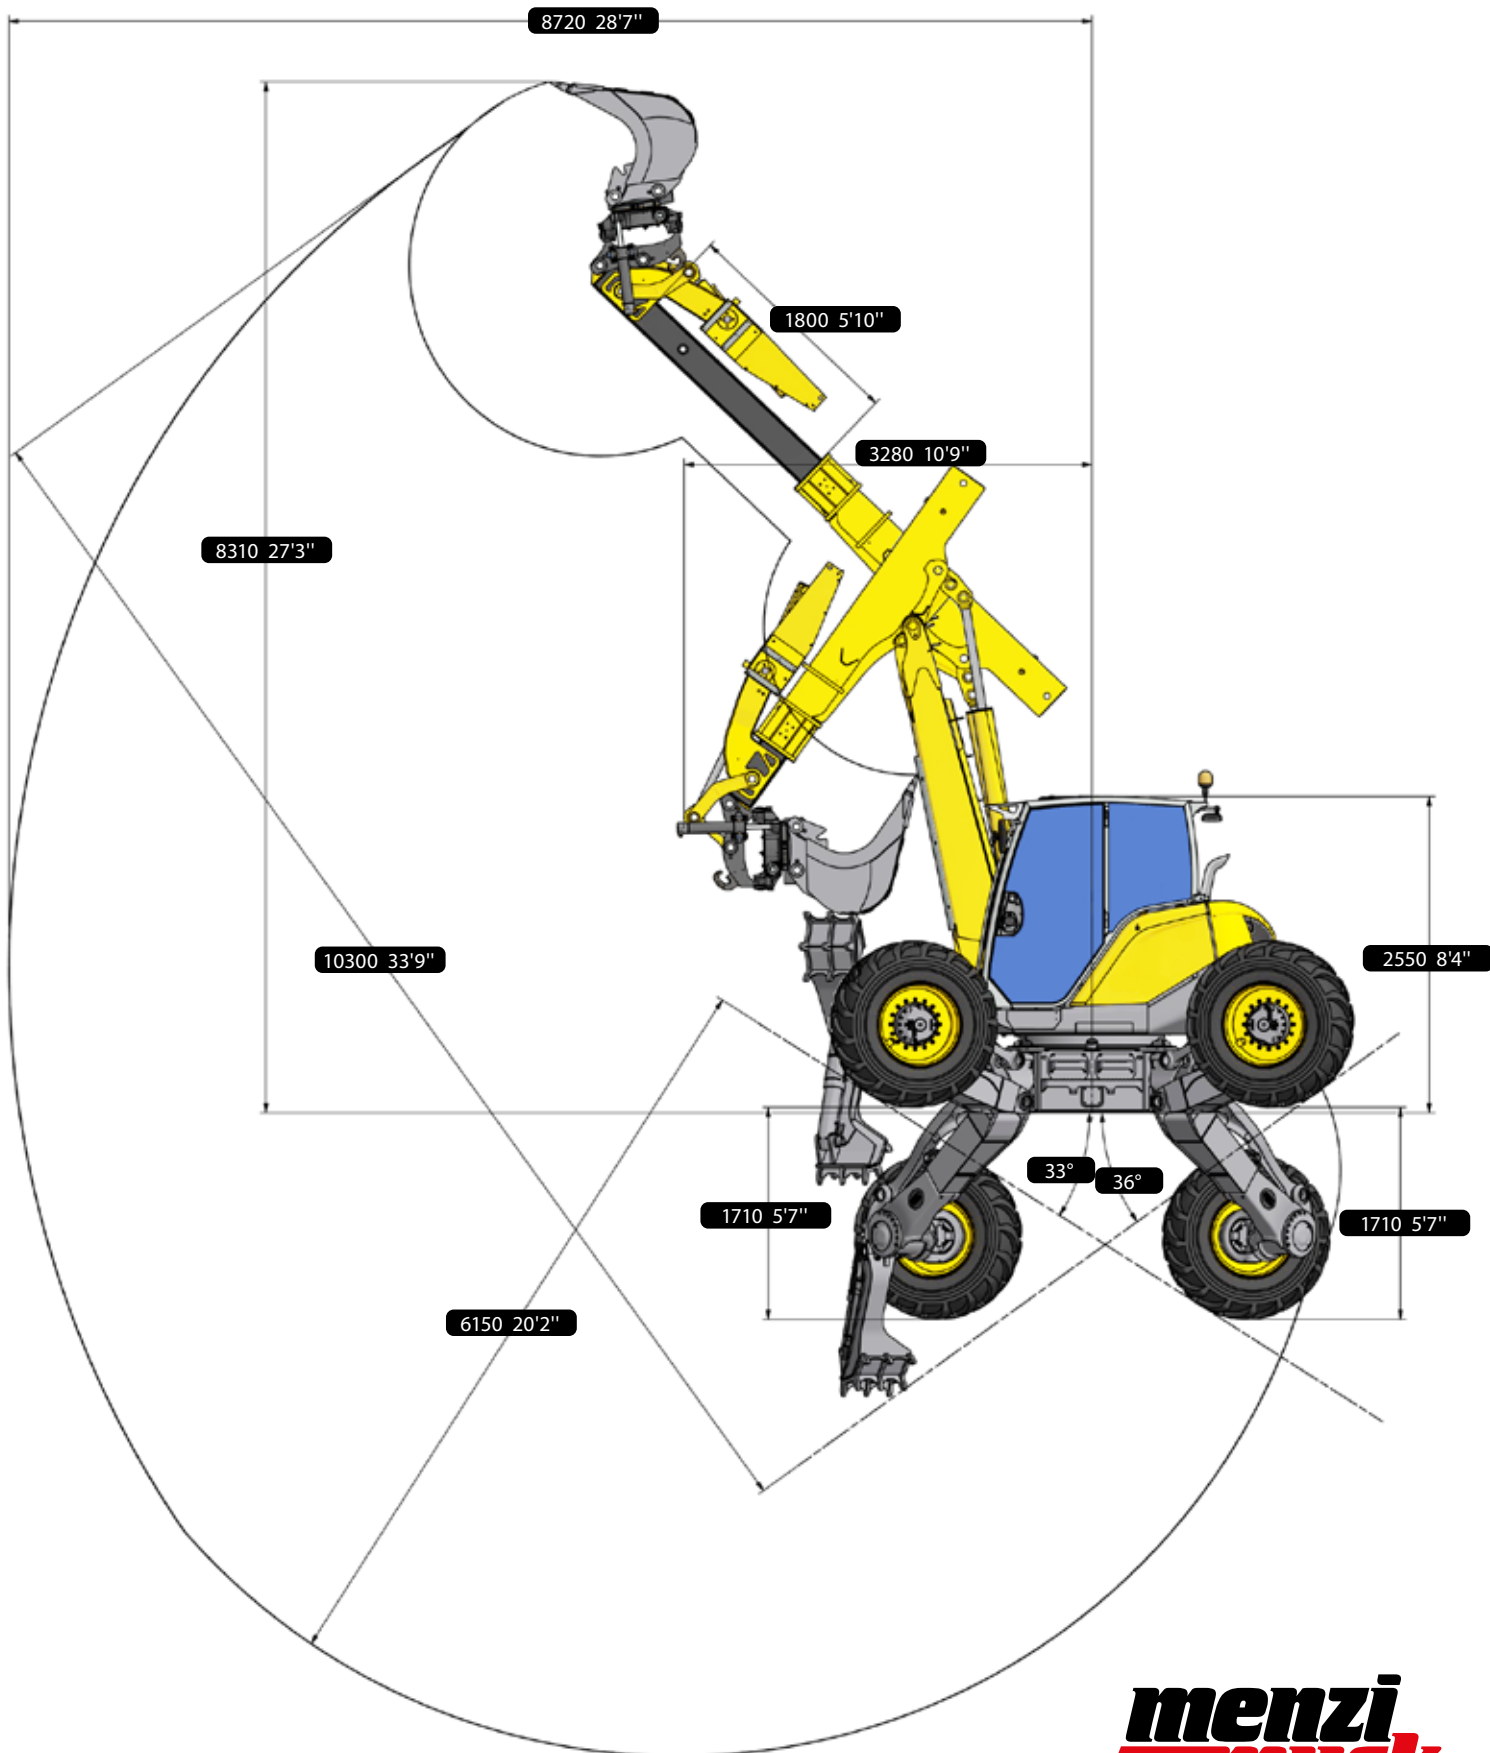

Follow us.



www.menzimuck.com



[menzimuckcom](https://www.instagram.com/menzimuckcom)



[menzimuckcom](https://www.facebook.com/menzimuckcom)



[Menzi Muck AG](https://www.linkedin.com/company/menzi-muck-ag)



[menzimuckcom](https://www.youtube.com/menzimuckcom)

Technical data subject to change / 0823